

MATILA

We offer customers
The good solution

Matila Machinery (Jiangsu) Co.,Ltd

We offer customers
The good solution

ABOUT US

Matila Machinery (Jiangsu) Co., Ltd.

It is a joint venture subsidiary led by MATILA Industrial Co.,Ltd in Taiwan, relying on MATILA TAIWAN' s technical precipitation in the field of film blowing machine manufacturing for more than 30 years. As a high-tech enterprise, MATILA Jiangsu is mainly committed to the R & D and manufacturing of medium and high-end plastic film blowing equipments, and provides cost-effective film blowing units and technical engineering services for Asia Pacific and Central Asia.

Typical Products

Single layer blown film machines, AB double layer film blowing machines, ABA/ABC three layers blown film machines, ABCDE/ABCBA five layers film blowing machines, specialized agricultural films blowing machines and super wide industrial films making machines for materials of LDPE/LLDPE/PP/EVA etc..

Vision

Following the step of quality insistence from Taiwan Matila, Matila Machinery (Jiangsu) looks forwarding to growing together with you.

Products

We offer customers
The good solution

CM-H

HDPE Blown Film
Machine



CM-L

LDPE Blown Film
Machine



CM-AB

Double Layer Co-extrusion
Blown Film Machine




CM-ABA

HD/LDPE ABA Co-extrusion
Blown Film Machine



CM-DH-L

Twin Head Blown
Film Machine

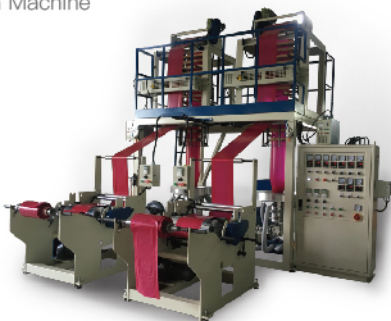

CM-TS

Two Color Stripe Line
Blown Film Machine



CM-ABC

3 Layer Co-extrusion
Blown Film Machine



CM series

Five-layer co-extrusion
blown film machine



Optional Devices

We offer customers
The good solution




Auto loader



Oscillating haul-off device



Vertical type rotary device

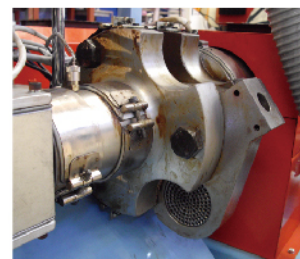


Lever type manual screen changer



Smart air ring




Thickness measuring system
Auto film thickness control system

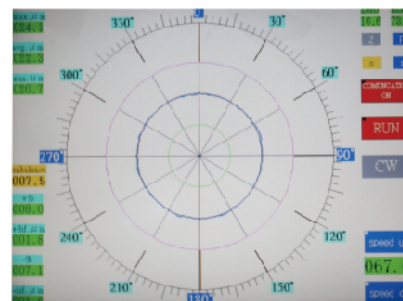

Control panel



Die rotary device

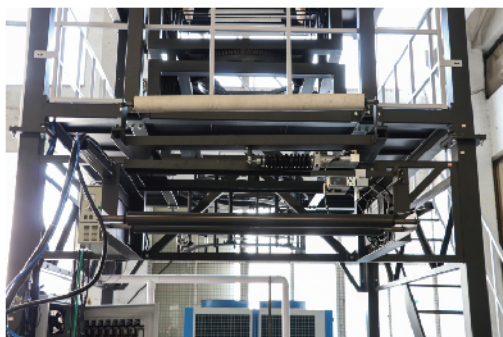

Central position control system



Gravimetric dosing system

Specification

The film thickness & film output will be different depending on material and film specification

The specification & designs are subject to change without notice for improvement

Model	Roller width (mm)	Film width (mm)	Film output (kg/hr)	Main motor (Kw)	Die head (mm)	Cooling blower (Kw)	Take up motor (Kw)
CM-H HDPE blown fim machine (HDPE/MDPE+LLDPE/EVA), HD:0.006–0.08mm							
CM-H25	300	120–200	5–12	3.7	30	0.75	0.25
CM-H35	500	150–400	15–28	7.5	60/40	1.5	0.37
CM-H45	650	200–550	25–45	15	70/50	2.2	0.37
CM-H55	800	300–700	35–75	22	100/180	3.7	0.75
CM-H65	1100	500–1000	50–100	37	150/120	3.7	0.75
CM-H80	1500	700–1350	80–140	55	180/150	5.5	1.5
CM-L LD/LLDPE blown film machine, LD:0.02–0.25mm							
CM-L25	300	50–200	6–15	3.7	40	0.75	0.25
CM-L35	500	15–400	15–33	7.5	80	1.5	0.37
CM-L45	800	400–700	25–50	15	150	2.2	0.37
CM-L55	1100	600–1000	40–90	22	220	3.7	0.75
CM-L65	1500	800–1350	60–130	37	300	3.7	0.75
CM-L80	2000	1000–1800	120–200	55	380	5.5	1.5
CM-L100	2500	1300–2300	180–280	93	500	11	2.2
CM-L120	3000	1600–2800	240–360	112	600	15	3.7
CM-L150	3500	2000–3300	350–500	149	700	22	3.7
CM-AB LD/LLDPE Double layer co–extrusion blown film machine (LDPE/LLDPE) , 0.015–0.20mm							
CM-AB35	800	400–700	25–60	7.5*2	150	2.2	0.75
CM-AB45	1100	600–1000	40–100	15*2	220	3.7	0.75
CM-AB55	1500	800–1350	60–150	22*2	300	5.5	1.5
CM-AB65	2000	1000–1800	100–220	37.2	380	7.5	1.5
CM-AB80	3000	1600–2800	200–350	55*2	600	15	2.2
CM-AB100	4000	2400–3800	300–500	75*2	850	22	3.7
CM-ABA ABA co–extrusion blown film machine, HD:0.008–0.08mm/LD:0.02–0.15mm							
CM-ABA-3535–650	650	300–550	25–40	7.5*2	80	2.2	0.37
CM-ABA-3545–650	650	300–550	30–45	7.5*1+15*1	80	2.2	0.37
CM-ABA-4545–800	800	400–700	40–80	15*2	100	3.7	0.75
CM-ABA-4555–1100	1100	600–1000	50–100	15*1+22*1	150	5.5	0.75
CM-ABA-5555–1500	1500	800–1350	60–150	22*2	300/180	5.5	1.5
CM-ABA-5565–1500	1500	800–1350	60–170	22*1+37*1	300/180	5.5	1.5
CM-ABA-6565–2000	2000	1000–1800	100–220	37*2	400/250	7.5	2.2
CM-DH-H/L Twin head blown film machine, (CM-DH-H is suitable for HDPE, CM-DH-L is suitable for LDPE) HD:0.006–0.06mm/LD:0.02–0.12mm							
CM-DH-H45	400	150–300	30–45	15	40	0.75	0.37
CM-DH-H55	500	200–400	40–70	22	60	1.5	0.37
CM-DH-H65	650	300–550	50–80	37	70	2.2	0.37
CM-DH-L45	400	150–300	30–50	15	60	0.75	0.37
CM-DH-L55	500	200–400	40–80	22	80	1.5	0.37
CM-DH-L65	650	300–550	60–110	37	120	2.2	0.37
CM-TS/CM-TS3 Two/ Three color stripe line blown film machine, HD:0.006–0.08mm/LD:0.02–0.15mm							
CM-TS35	650	300–550	30–45	7.5*2	80/120	2.2	0.37
CM-TS45	800	400–700	40–65	15*2	100/150	3.7	0.75
CM-TS55	1100	600–1000	60–110	22*2	150/220	5.5	0.75
CM-TS3/35	800	400–700	25–65	7.5*3	100/150	3.7	0.75
CM-TS3/45	1100	600–1000	40–100	15*3	150/220	5.5	0.75
CM-TS3/55	1500	800–1350	80–150	22*3	200/300	7.5	1.5

Specification

The film thickness & film output will be different depending on material and film specification

The specification & designs are subject to change without notice for improvement

Model	Roller width (mm)	Film width (mm)	Film output (kg/hr)	Main motor (Kw)	Die head (mm)	Cooling blower (Kw)	Take up motor (Kw)
CM-ABC ABC 3 layer co-extrusion blown film machine (HD/LD/LLD/MDPE/EVA), 0.02-0.2mm							
CM-ABC-444-1100	1100	600-1000	40-130	20*2.2	220	3.7	0.75
CM-ABC-444-1500	1500	800-1350	40-130	20*2.2	300	5.5	1.5
CM-ABC-454-1100	1100	600-1000	40-160	20*1.5+30*0.75	220	3.7	0.75
CM-ABC-454-1500	1500	800-1350	40-160	20*1.5+30*0.75	300	5.5	1.5
CM-ABC-555-1500	1500	800-1350	60-200	30*2.2	300	7.5	1.5
CM-ABC-565-1500	1500	800-1350	60-230	30*1.5+50*0.75	300	7.5	1.5
CM-ABC-565-2000	2000	1000-1800	60-230	30*1.5+50*0.75	380	11	2.2
CM-ABC-666-2000	2000	1000-1800	60-280	50*2.2	380	11	2.2
CM-ABC-666-2500	2500	1300-2300	60-280	50*2.2	500	15	2.2
CM-ABC-686-2000	2000	1000-1800	60-340	50*1.5+75*0.75	380	15	2.2
CM-ABC-686-2500	2500	1300-2300	60-340	50*1.5+75*0.75	500	15	2.2
CM-ABC-818-3500	3500	1800-3300	60-560	75*1.5+125*0.75	700	22	3.7
CM-ABC-818-4000	4000	2400-3800	60-560	75*1.5+125*0.75	850	22	3.7
CM-ABC-888-3000	3000	1600-2800	60-420	75*2.2	600	22	3.7
CM-ABC-888-3500	3500	1800-3300	60-420	75*2.2	700	22	3.7
CM-ABC-111-4000	4000	2400-3800	60-720	125*2.2	850	22	3.7
CM-ABC-111-5000	5000	3400-4800	60-720	125*2.2	1200	15	5.5
CM-ABCDE 5 layer co-extrusion blown film machine (HD/LD/LLD/MDPE/PA/EVOH/EVA), 0.03-0.15mm							
CM-44444/1500	1500	800-1350	120-180	20*3.7	300/200	7.5	1.5
CM-54445/1500	1500	800-1350	120-220	20*2.2+30*1.5	300/200	7.5	1.5
CM-54445/2000	2000	1000-1800	120-220	20*2.2+30*1.5	400/250	11	2.2
CM-55555/2000	2000	1000-1800	120-280	30*3.7	400/250	11	2.2
CM-P PP blown film machine, 0.02-0.08mm							
CM-P35	300	50-200	5-15	5.5	60	0.09*2	0.18
CM-P45	500	150-400	15-30	11	200	0.09*2	0.37
CM-P55	650	300-550	20-50	15	300	0.09*2	0.37
CM-P65	800	400-700	30-65	22	400	0.09*2	0.75
CM-P80	1100	500-950	40-80	30	500	0.18*2	0.75
CM-TPU Mono/double layer TPU blown film machine, 0.012-0.12mm							
CM-L80TPU/2000	2000	1600	30-80	Servo 30	650	INV 11	2.2
CM-L80TPU/2600	2600	2200	30-80	Servo 30	900	INV 11	2.2
CM-L100TPU/3000	3000	2800	60-120	Servo 45	1000	INV 11	3.7
CM-DL8065TPU/2000	2000	1600	60-150	Servo 30+22.5	650	INV 11	2.2
CM-DL8065TPU/2600	2600	2200	60-150	Servo 30+22.5	900	INV 11	2.2

Matila machinery (Jiangsu) Co., Ltd.

Tel: +86-512-58622012 Fax: +86-512-58622013
 E-mail: info@matilachina.com Web: www.matilachina.com

No.18 Yuefeng Road, Zhangjiagang City, Jiangsu Province, China.